



# Solid State Broadband High Power Amplifier

**APCT-0.10-2.70-20-32V**

**100 – 2700 MHz / 20 Watts**

Model APCT-0.10-2.70-20-32V is a gallium-nitride (GaN) solid state broadband high power amplifier designed to provide 20 W output power across its full operating bandwidth and operate from a +32V supply. This compact module utilizes high power advanced GaN on SiC transistors that provide excellent power density, high efficiency and wide dynamic range. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, machined housings and qualified components. APC Technologies ISO9001 Quality Management System assures consistent performance and the highest reliability.

### Features

- Solid-state Class AB linear design
- Instantaneous broadband
- Small form factor and lightweight
- Built-in temperature monitoring
- Built-in high speed switching On/Off
- 50 ohm input/output impedance
- High reliability and ruggedness

### Applications

- General Purpose
- Communication Systems
- RF Frequency Jamming Systems
- ISM(Industrial, Scientific and Medical equipment)
- Radar Simulator
- EMC Testing
- Broadcasting

### Electrical Specifications @ $V_{CC} = 32V$ ; $T_C = 45^\circ C$ ; $Z_S = Z_L = 50\Omega$

Parameter	Min	Typ	Max	Unit	Condition	
Operating Frequency	100	-	2700	MHz	-	
Power Gain @ Pin3dBm	100MHz ~ 2.0GHz	39	40	-	dB	100 ~ 2000 MHz
	2.0GHz ~ 2.7GHz	40	41	-		2000 ~ 2700 MHz
Power Gain Flatness @ Pin3dBm	-	±2.0	±3.0	dBpp	100 ~ 2700 MHz	
Output Power @ Pin3dBm	100MHz ~ 2.0GHz	41	42	-	dBm	100 ~ 2000 MHz
	2.0GHz ~ 2.7GHz	43	44	-		2000 ~ 2700 MHz
Input Return Loss	-	-10	-5	dB	-	
Supply Voltage	32	-	-	V	$V_{CC} (=V_{DS})$	
Quiescent Current Consumption	-	0.7	1.2	A	-	
Current Consumption @ Pin3dBm	-	2.8	4.0	A	CW 1-tone	
Shut Down TTL Voltage ***	0	-	0.5	V	ON: TTL "Low" (Enable)	
	2.5	5	5.5		OFF: TTL "High" (100mA @ Disable)	

Note  
 \*\*\* Drain On/Off : 500ms delay

## Solid State Broadband High Power Amplifier

### Mechanical Specifications

Parameter	Value	Unit
Dimension	55(L) x 50(W) x 15(H)	mm
RF Connectors	RF Input : SMA Female	-
	RF Output : SMA Female	-
DC Connector	SMW200-08	-
Cooling	Adequate Heatsink Required (Not Supplied)	-

### Absolute Maximum Ratings

Parameter	Parameter	Unit
Input RF Power	5	dBm
Supply Voltage	36	V
Load Mismatch Value	3 : 1 @ all load phase	-

\* Input Signal Condition : CW 1-tone


### Environmental Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T <sub>c</sub>	-20	-	80	°C
Operating Ambient Temperature	T <sub>smb</sub>	-40	-	60	°C
Storage Temperature	T <sub>stg</sub>	-50	-	110	°C
Vibration	VI	MIL-STD-810G Method 514.6 ANNEX C			

# Solid State Broadband High Power Amplifier

## Outline Drawing

Unit: mm[inch] | Tolerance:  $\pm 0.2$ [.008]

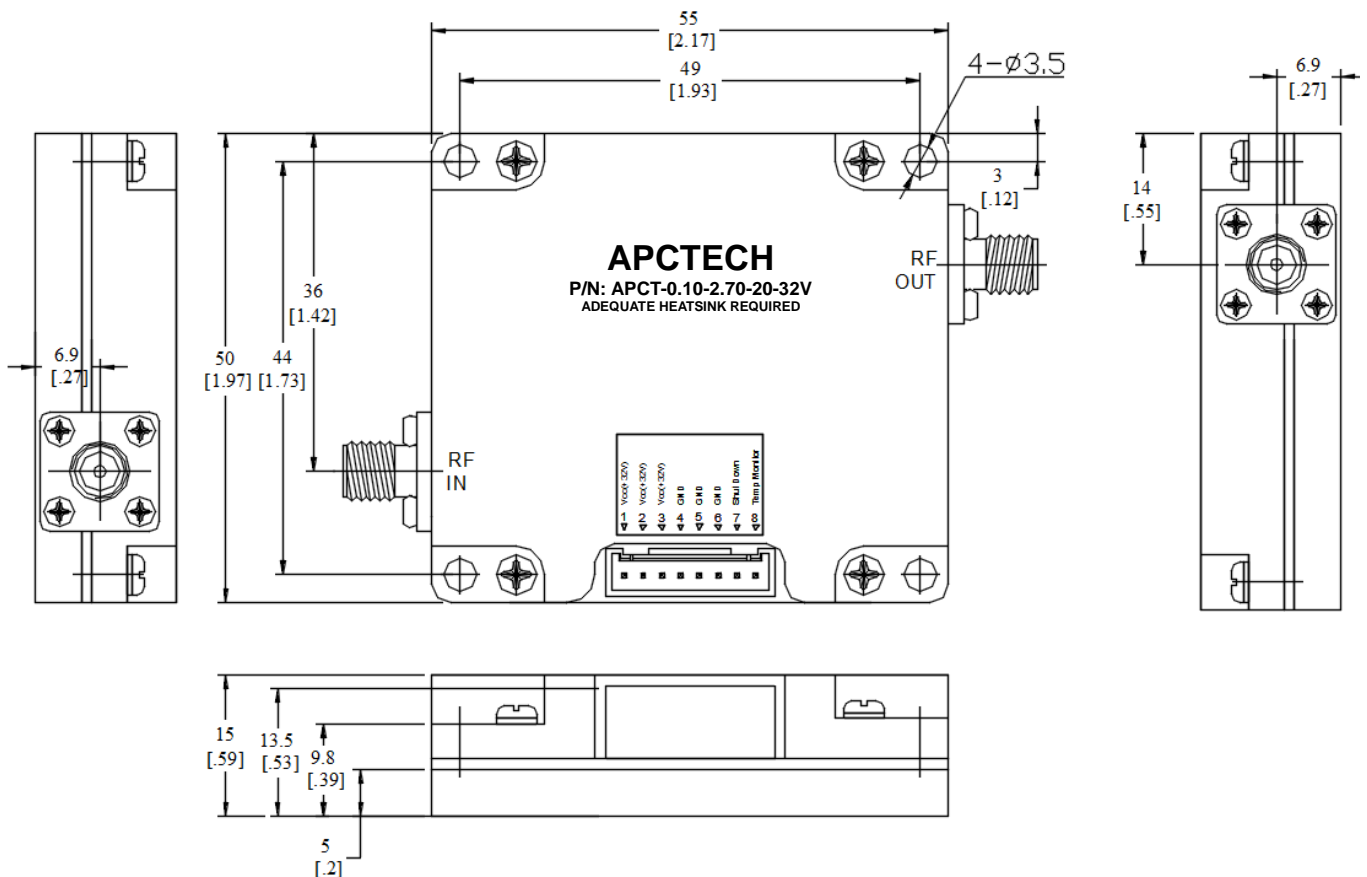

## DC Connector Description

Pin #	Description	Specifications
1	V <sub>cc</sub>	+32VDC
2	V <sub>cc</sub>	+32VDC
3	V <sub>cc</sub>	+32VDC
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	Shut Down	Enable : TTL "Low", Disable : TTL "High" (Low : 0~0.5V, High : 2.5~5V) Disable Status : 50mA current consumption
8	Temperature Monitor	Reference voltage : 750mV @ 25°C, Scale : 10mV/°C

\* Interface Connector Information SMW200-08(YEONHO Electronic, Wafer), SMH200-08(YEONHO Electronic, Housing)

\* Recommended Screw Torque : 8.0kgf.cm $\pm 1$  using SEMS M3 20mm Bolt



# Solid State Broadband High Power Amplifier

---

## Product Ordering Information

Order Number	Description	Unit of Measure
APCT-0.10-2.70-20-32V	100-2700MHz 20W GaN Solid State Broadband High Power Amplifier	Each
SMH200-08	Interface Connector Housing with Cables	Each

## Datasheet Revision Information

Part Number	Version	Release Date	Modification	Status
APCT-0.10-2.70-20-32V	0.9	2018.Aug.13		Preliminary

## Important Notice

Specifications are subject to change without notice. APC Technologies believes the information contained within this data sheet to be accurate and reliable. However, APC Technologies assumes no responsibility or liability whatsoever for any of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. Customers should obtain and verify the latest relevant information before placing orders for APC Technologies products. All operating parameters should be validated by customer's technical experts for each application. APC Technologies products are not designed, intended or authorized for use as components or amplifiers in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the APC Technologies product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

### APC Technologies

ISO 9001:2008 Certified Company

414, Aggarwal Cyber Plaza-I, Neta Ji Subhash Place  
Pitampura, New Delhi – 110034, INDIA

[sales@apctechnologies.in](mailto:sales@apctechnologies.in)

91.11.49067163