

Solid State Broadband High Power Amplifier

APCT-0.50-2.50-100-36V
500 – 2500 MHz / 100 Watts

Model APCT-0.50-2.50-100-36V is a gallium-nitride (GaN) solid state broadband high power amplifier designed to provide 100 W output power across its full operating bandwidth and operate from a +36V supply. This compact module utilizes high power advanced GaN on SiC transistors that provide excellent power density, high efficiency and wide dynamic range. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, machined housings and qualified components. APC Technologies ISO9001 Quality Management System assures consistent performance and the highest reliability.

Features

- Solid-state Class AB linear design
- Instantaneous broadband
- Small form factor and lightweight
- Built-in temperature monitoring
- Built-in high speed switching On/Off
- 50 ohm input/output impedance
- High reliability and ruggedness

Applications

- General Purpose
- Communication Systems
- RF Frequency Jamming Systems
- ISM(Industrial, Scientific and Medical equipment)
- Radar Simulator
- EMC Testing
- Broadcasting

Electrical Specifications @ $V_{CC} = 36V$; $T_C = 45^\circ C$; $Z_S = Z_L = 50\Omega$

Parameter	Min	Typ	Max	Unit	Condition
Operating Frequency	500	-	2500	MHz	-
Power Gain @ Pin -10dBm	58	60	-	dB	500 ~ 2500 MHz
Power Gain Flatness @ Pin -10dBm	-	±1.0	±2.0	dBpp	500 ~ 2500 MHz
Output Power @ Pin -10dBm	48	50	-	dBm	500 ~ 2500 MHz
Input Return Loss	-	-10	-5	dB	-
Supply Voltage	36	-	-	V	$V_{CC} (=V_{ds})$
Quiescent Current Consumption	-	1.9	1.2	A	-
Current Consumption @ Pin -10dBm	-	8.0	11.0	A	CW 1-tone
On/Off Switching Time **	uS	-	2	5	On : TTL "Low"
					Off : TTL "High" (100mA @ Disable)
Shut Down TTL Voltage ***	0	-	0.5	V	ON: TTL "Low" (Enable)
	2.5	5	5.5		OFF: TTL "High" (100mA @ Disable)

Note

** Gate On/Off : High speed switching

*** Drain On/Off : 500ms delay

Solid State Broadband High Power Amplifier

Mechanical Specifications

Parameter	Value	Unit
Dimension	150(L) x 75(W) x 21.5(H)	mm
Weight	478.5	g
RF Connectors	RF Input : SMA Female	-
	RF Output : N-Type Female	-
DC Connector	SMW420-08	-
Cooling	Adequate Heatsink Required (Not Supplied)	-

Absolute Maximum Ratings

Parameter	Parameter	Unit
Input RF Power	-8	dBm
Supply Voltage	38	V
Load Mismatch Value	3 : 1 @ all load phase	-

* Input Signal Condition : CW 1-tone


Environmental Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _c	-10	-	70	°C
Storage Temperature	T _{stg}	-40	-	100	°C
Vibration	VI	MIL-STD-810G Method 514.6 ANNEX C			

Solid State Broadband High Power Amplifier

Outline Drawing

Unit: mm[inch] | Tolerance: ± 0.2 [.008]

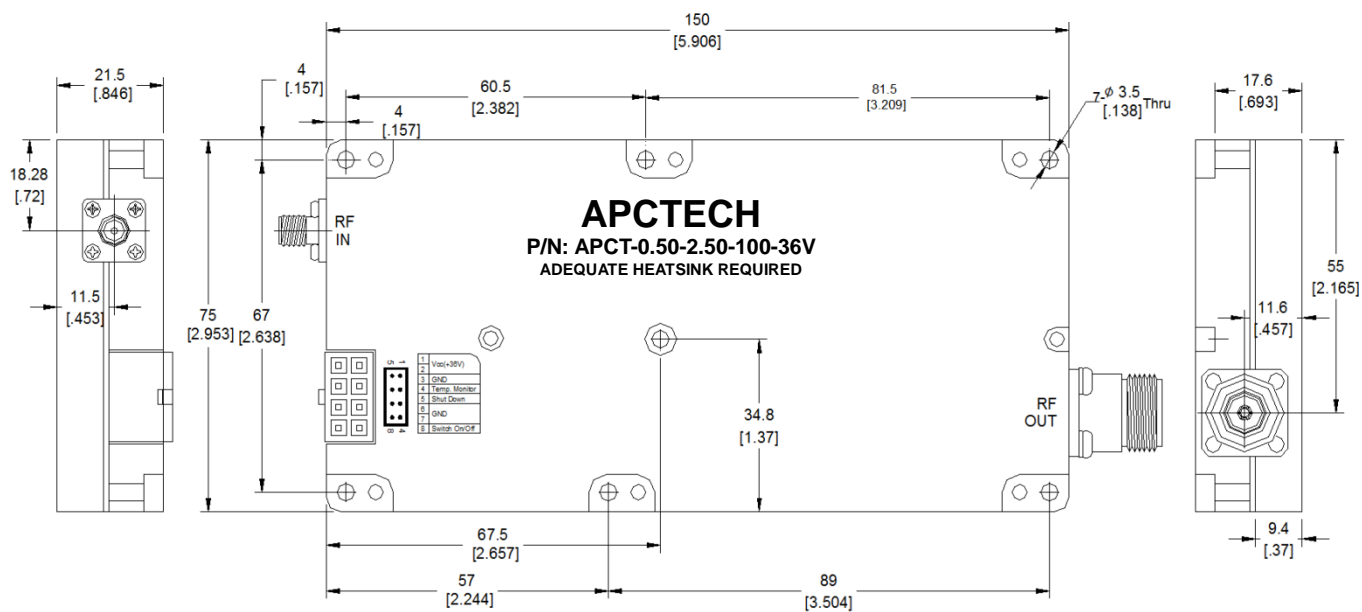

Interface Connector Pin Description

Pin #	Description	Specifications
1	V _{cc}	+36VDC
2	V _{cc}	+36VDC
3	GND	Ground
4	Temperature Monitor	Reference voltage : 750mV @ 25°C, Scale : 10mV/°C
5	Shut Down	Enable : TTL "Low", Disable : TTL "High" (Low : 0~0.5V, High : 2.5~5V) Disable Status : 100mA current consumption
6	GND	Ground
7	GND	Ground
8	Switch ON/OFF	Enable : TTL "Low", Disable : TTL "High" (Low : 0~0.5V, High : 2.5~5V) Disable Status : 50mA current consumption

* Interface Connector Information SMW420-08(YEONHO Electronic, Wafer), SMH420-08(YEONHO Electronic, Housing)

* Recommended Screw Torque : 8.0kgf.cm ± 1 using SEMS M3 22mm Bolt



Solid State Broadband High Power Amplifier

Product Ordering Information

Order Number	Description	Unit of Measure
APCT-0.50-2.50-100-36V	500-2500MHz 100W GaN Solid State Broadband High Power Amplifier	Each
SMH420-08	Interface Connector Housing with Cables	Each

Datasheet Revision Information

Part Number	Version	Release Date	Modification	Status
APC0.5-2.5-100-32V	0.1	2015.Sept.01	-	Preliminary
APCT-0.5-2.5-100-32V	0.2	2015.Dec.01	Changed Part Number added Company Logo added Important Notice	Preliminary
APCT-0.50-2.50-100-36V	0.9	2016.Dec.08	Modify Part Number, Document Form, Applications, Electrical Specifications, Dimensions, Weight, Outline Drawing, Interface Connector Pin Description, Product Ordering Information	Preliminary

Important Notice

Specifications are subject to change without notice. APC Technologies believes the information contained within this data sheet to be accurate and reliable. However, APC Technologies assumes no responsibility or liability whatsoever for any of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. Customers should obtain and verify the latest relevant information before placing orders for APC Technologies products. All operating parameters should be validated by customer's technical experts for each application. APC Technologies products are not designed, intended or authorized for use as components or amplifiers in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the APC Technologies product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

APC Technologies
27FF, Dreamz Mall, Old Railway Road,
Gurgaon – 122001 (Haryana), INDIA
sales@apctechnologies.in
91.124.2250422